



Spectrum Brands, Inc.
3001 Deming Way
Middleton, WI 53562
Telephone 1-800-331-4522
Internet www.rayovac.com

Marketing Data Sheet- Fusion C



Rayovac Stock Number: 814FUS

Name: 814 Fusion Alkaline Battery

Engineering Parameters

Cell Chemistry

Alkaline Manganese Dioxide

Designation

ANSI/NEDA – 14A (AA), IEC – LR14

Nominal Voltage

1.5 volts

Approximate Weight

2.5 Oz (70 grams)

Approximate Volume

1.6 CU IN (26 cc)

Operating Temp. Range


-30° C to 55° C (-20° F to 130° F)

Terminals: Flashlight

Shell Plastic Film

Environmental

Meets Environmental Protection Agency (EPA)
Requirements For Landfill Disposal.
No Mercury Added Formulation
Meets EU Battery Directive 2006/66/EC
For Safety Data sheets, visit:
www.rayovac.com/Contact/safety-data-sheets.aspx

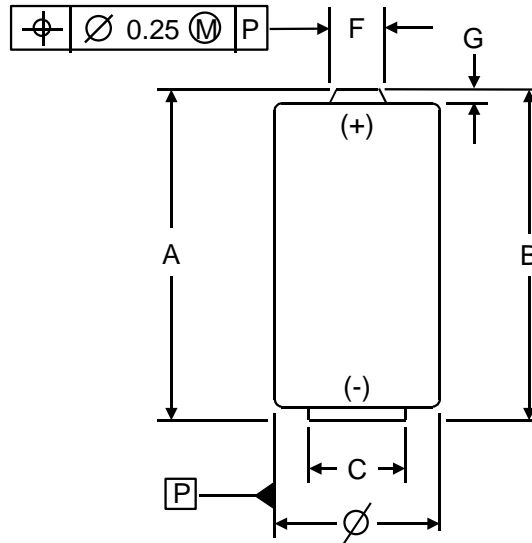

Dimensions	Millimeters	Inches
A (Max)	50.0	1.969
B (Min)	48.6	1.913
C (Min)	13.0	0.512
E (Max)	0.9	0.035
F (Max)	7.5	0.295
G (Min)	1.5	0.059
∅ (Max)	26.2	1.031
∅ (Min)	24.9	0.980

Typical Initial Service Life

Application and Duty Cycle	Discharge Load	Midpoint Current mA	Cut-off Voltage	Service	Units	Discharge Capacity (mAh)
Lighting 4 min/hr, 8hr/day	3.9 Ω	300	0.9	22	hours	6600
Toy 1 hr/day	3.9 Ω	293	0.8	23	hours	6740
Portable Stereo 2 hrs/day	400 mA	400	0.9	14	hours	5600
Radio 4 hrs/day	20 Ω	63	0.9	121	hours	7623