


Rayovac Stock Number: 123A

Document Number: S6600156 Rev.: E

## Dimensions:

(ANSI / IEC Standards)

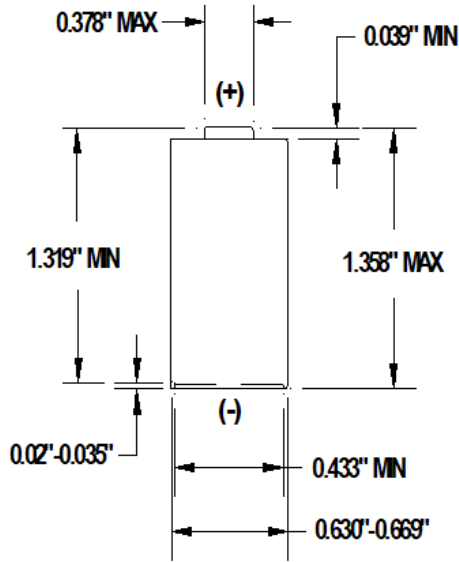

DIMENSIONS	
MM	INCHES
0.5	0.020
0.9	0.035
1.0	0.039
9.6	0.378
11.0	0.433
16.0	0.630
17.0	0.669
33.5	1.319
34.5	1.358

## Engineering Data:

<b>Cell Chemistry:</b>	Lithium/Manganese Dioxide (CR)	<b>Approximate Volume:</b>	7.18 CU CM
<b>Designation:</b>	ANSI/NEDA-5018LC, IEC-CR17345	<b>Nominal Capacity:</b>	1400mAh (100 Ohm Cont. to 2.0V @ 20°C)
<b>Nominal Voltage:</b>	3.0 V	<b>Operating Temp. Range:</b>	-20°C to 60°C
<b>Maximum Off-Load Voltage:</b>	3.7 V	<b>Storage Temp. Range</b>	-20°C to 45°C
<b>Approximate Weight:</b>	16 g	<b>Terminals:</b>	Cap and Recessed Base
<b>Environmental:</b>	No mercury added formulation meets Environmental Protection (EPA) requirements for landfill disposal.		

## Typical Service @ 20°C:

Application:	Load	Load Unit	Duty Cycle	Daily Cycle	EPV	ANSI Min. Ave. Duration	Typical
<b>Rating:</b>	100	Ohms		24 h	2.0	45 Hours	54 Hours