



Charger Specifications:

Cell Chemistry:	Rechargeable Nickel Metal Hydride (NiMH) and NiCd
Cell Size and Quantity:	2 or 4 AAA or AA (Paired)
Approximate Dimensions:	111L x 70W x 30H (mm)
Housing:	PPO
Approximate Weight:	91 g.
Ave. Main Charge Current:	AAA @ 100mA (±20%) - Per Cell AA 200mA (±20%) - Per Cell
Operating Temperature Range:	10°C to 40°C
Input:	Plug Type: NEMA 1-15, Flip Plug
Internal Power Supply:	Yes
Input Voltage/Frequency:	100-120VAC (±10%), 50/60 Hz

Charge Times:

RAYOVAC Charge Times:

SIZE	Capacity (mAh)	Charge Time (Hrs.)
AA	1350	8
AA	2400	14
AAA	600	7
AAA	900	10

LED Functions:


When AAA/AA batteries are placed in the charger, the LED will light up indicating proper charging. After 12.5 hours, the LED will turn off.

LED Status:

ON: Charge cycle in progress.

OFF: Charge complete (Termination Timer 11.5 Hours met).

Cell Alignment:

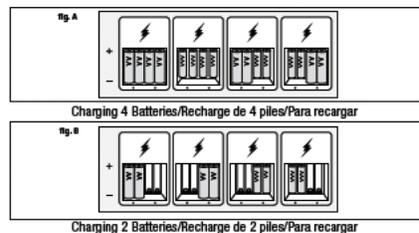

Environmental: Meets Environmental Protection Agency (EPA) Requirements for landfill disposal. No Mercury Added Formulation

Notice: Information within this document are specific to product at the time of publication. Contents Herein do not constitute a warranty