





Rayovac Stock Number: AL9V ULTA PRO

Specifications

Cell Chemistry:	Alkaline
Designation:	ANSI/NEDA – 1604A , IEC – 6LR61
Nominal Voltage:	9 Volts
Approximate Weight:	1.6 Oz (45.4 grams)
Approximate Volume:	1.2 CU IN (19.7 CU CM)
Operating Temp. Range:	-30° C to 55° C (20° F to 130° F)
Terminals:	Snap
Jacket:	Steel
Environmental:	No mercury added formulation Meets Environmental Protection Agency (EPA) Requirements for landfill disposal.

[Rayovac Material Data Sheets](#)

IEC Standard Dimensions

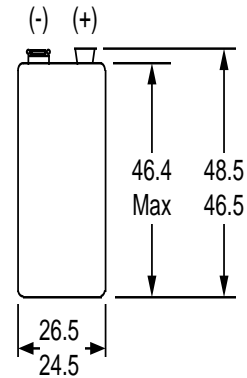

Meets EU Battery Directive 2006/66/EC

Typical Initial Service Life (ANSI C18.1 Tests)

Name	Test	Runtime
Toy	270 Ω 1 HR/DY to 5.4 V	22 HR
Radio, Light drain	620 Ω 2 HR/DY to 5.4 V	48 HR
Smoke Detector	620 Ω 1 sec / 10,000 ohm 3,599 sec to 7.5 V	20 DY