




<b>Name</b>	Premium 675 0 Hg
<b>Cell Chemistry</b>	Zinc Air
<b>Designation</b>	IEC: PR44, ANSI: 7003ZD, Common: 675
<b>Nominal Voltage</b>	1.45 volts
<b>Weight</b>	1.76 grams (0.063 oz)
<b>Volume</b>	0.57 cc (0.035 cu. in.)
<b>Operating Temperature Range</b>	-10°C to 50°C (14°F to 122°F)
<b>Impedance</b>	< 4.0 ohm @ AC 1000 Hz
<b>IEC/ANSI Standard</b>	111 hours - 5 mA background, 15 mA 100 ms pulse once every 2 hr, 12 hr/day to 1.05V at 21°C (70°F) and 50% RH
<b>IEC/ANSI High Drain</b>	59 hours - 8 mA background, 24 mA 100 ms pulse once every 2 hr, 12 hr/day to 1.05V at 21°C (70°F) and 50% RH
<b>How to Use</b>	Hearing Aid Instruments: Remove and discard the plastic tab covering air holes. Allow the battery to stand for fifteen seconds to ensure proper activation.
<b>Storage Conditions</b>	Batteries should be stored in ambient conditions between +10°C (50°F) and +30°C (86°F). Avoid direct sunlight.
<b>Shelf Life</b>	Four years with tab applied when stored at 21°C (70°F)
<b>Environmental</b>	These cells have no added mercury. Refer to Rayovac Safety Data Sheets for more detailed information.
<b>Compliant to the following Standards</b>	IEC 60086-1, IEC 60086-2, ANSI C18.1M Parts 1 & 2

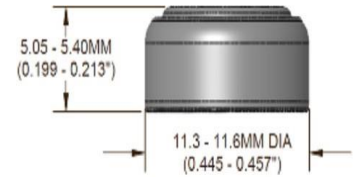

DIMENSIONS SHOWN ARE IEC STANDARDS FOR ENGINEERING TOLERANCES CONTACT RAYOVAC.



**Typical IEC/ANSI Standard Discharge Performance**

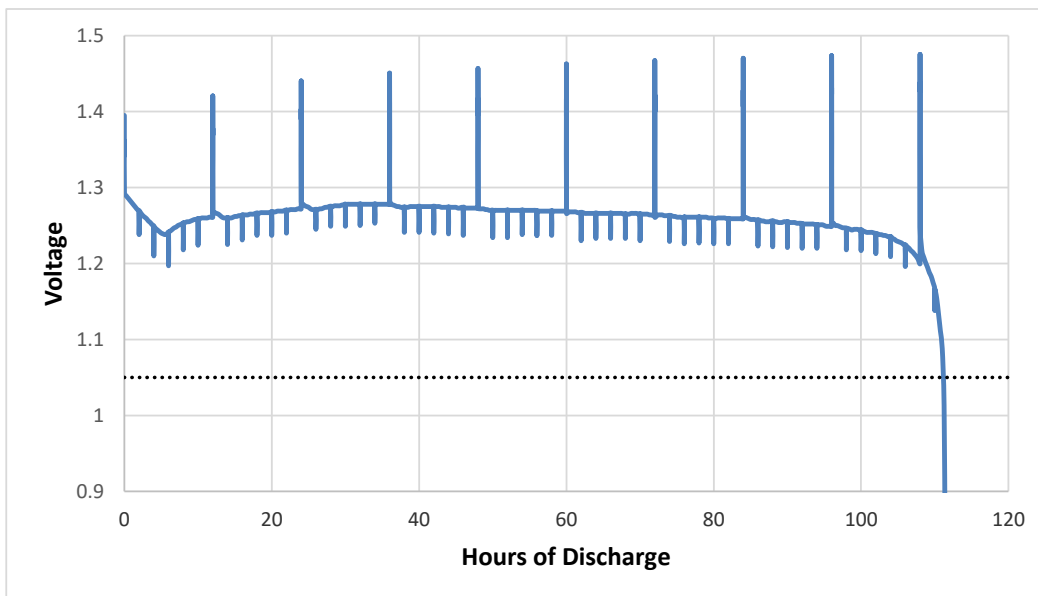

**Important Notice**

Do not duplicate or distribute without written permission from Energizer Holdings, Inc. This data sheet contains typical performance information specific to products manufactured at the time of its publication. This data is subject to change without prior notice. Contact your account manager for latest information.

Rayovac a division of Energizer Holdings: [www.rayovac.com](http://www.rayovac.com) | [www.rayovac.eu](http://www.rayovac.eu)  
**Contents herein do not constitute a warranty and are for reference only.**