


Rayovac Stock Number: 303/357

Name: 303/357 Silver Oxide Battery

Specifications

Chemistry: Silver Oxide (Zn/Ag₂O)
Designation: ANSI – 1131SO, IEC-SR44
Nominal Voltage: 1.55 volts
Approximate Weight: 0.08 oz. (2.33 grams)
Approximate Volume: 0.031 cu in (.51 ccm)
Operating Temp: 14°F to 149°F (-10°C to 65°C)
Shelf Life: 10 years at 68°F
Terminals: Flat Contact
Environmental: No mercury added formulation. Meets Environmental Protection Agency (EPA) requirements for landfill disposal.
[Rayovac Material Safety Sheets](#)


ANSI / IEC Standard Dimensions

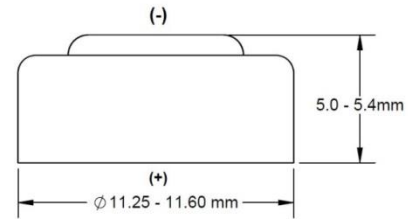

Typical Service Life (68°F) – Application Tests

Application	Drain	Service	IEC Std.	Rayovac
IEC-Cont.	6.8kΩ	Continuous	620 (hrs.)	744 (hrs.)
IEC-Pulse	5.6k/36Ω	1s/6s	450 (Pulses)	504 (Pulses)

Discharge Curve

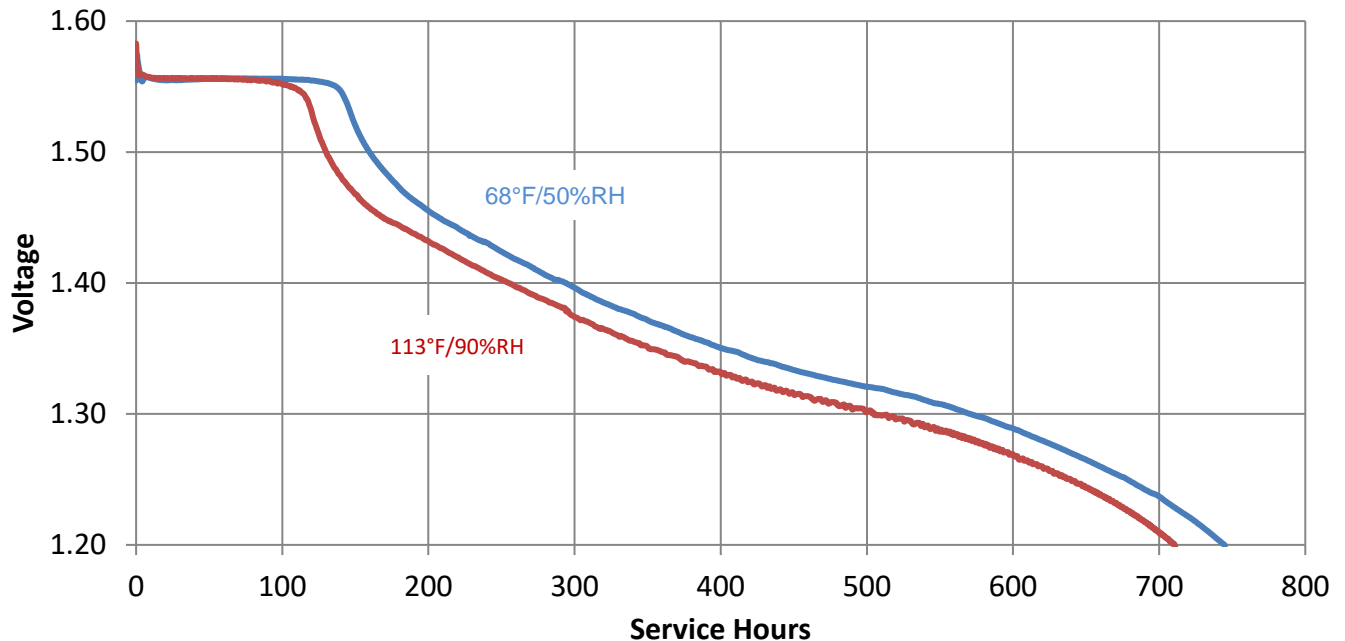

Load: 6.8kΩ Continuous **Temperature/Delay:** 68°F/50%RH Initial and 113°F/90%RH 60 Day delay

Contents are subject to change without notice and do not constitute a warranty.